

# P37B

## 3.7" Ultra Rugged PDA with Marvell PXA 270 Processor



### Features

- Marvell PXA 270 624 MHz core
- 3.7" VGA TFT LCD transfective technology
- IP67 rating guarantees total protection against dirt, dust and water
- Certified by MIL-STD-810F and MIL-STD-461E
- Standard 5-way controller and 4 function keys for one-hand operation
- High capacity Li-ion battery provides 6 hours of continuous operation
- Field navigation application with HSDPA (3.5 G), 802.11b/g, Bluetooth and GPS
- Supports Windows® CE5.0
- Handheld, vehicle mounting solution for mobile application

### Introduction


The P37B is an ultra rugged portable computer featuring a 3.7" transfective VGA TFT LCD display and Marvell PXA 270 624 MHz processor. With GPS, HSDPA (3.5G), Wi-Fi and built-in Bluetooth, P37B provides a fully-functional communication device for any outdoor application. Certified by standard military grade MIL-STD-810F and MIL-STD-461E, P37B is constructed with an IP67 rating guaranteeing total protection against dirt, dust and water. Driven by a high capacity battery, P37B handles a 5-foot drop, and operates in an extreme range of operating temperatures, providing mobility in any harsh environment. Advantech's P37B is a strong device for reliable mobile communications in any environment.

### Specifications

Processor	CPU	Intel PXA270 624MHz
Memory		256 MB SDRAM on board
Storage		1 GB Flash ROM on board
Audio System		AC-97, built-in Internal microphone and one speaker
Display	Size/ Type	3.7" transfective TFT LCD,
	Max. Resolution	VGA 480 x 640 /QVGA 240 x 320
	Brightness (cd/m <sup>2</sup> )	100 nits LED back light
Touch Panel		4-wire resistive touch panel
Application Buttons		1 x power on/suspend button
		1 x software reset switch
		Navigation key and four function keys
I/O Port		1 x HW reset key located right side door
		1 x button for backlight on/off (using power on/ suspend button)
		2 x USB type A connectors, USB1.1 host
Communication	Standard	802.11b/g WLAN module build in
	Factory Options (Optional)	Bluetooth class 2, v1.2 built-in with integral antenna
		GPS & GALILEO receiver with antenna built-in
Dimensions & Weight		GSM/GPRS/WCDMA/HSDPA (3.5 G) internal module (for data transmission only)
		155 x 96 x 42 mm, 650 g
Power	Battery	Rechargeable Li-ion smart battery, 7.4 V, 1880 mAh, 2S1P, 59 x 38 x 25 mm
	Power Adapter	Universal AC 100 V ~ 240 V, 47 ~ 63 Hz input, 12 V, 3.5 A output
Environment	Operating Temperature	-20° C ~ +60° C
	Storage Temperature	-40° C ~ + 70° C
	Operating Humidity	5% ~ 95%
OS		Windows CE 5.0
Rugged Certification		IP67
		5 Feet drop to concrete
Certifications		MIL-STD-461E
		MIL-STD-810F
Accessories		CE, FCC, CCC
		Military Connector
	Hand Strap	Vehicle Mount Cradle

## Dimensions

Unit: mm

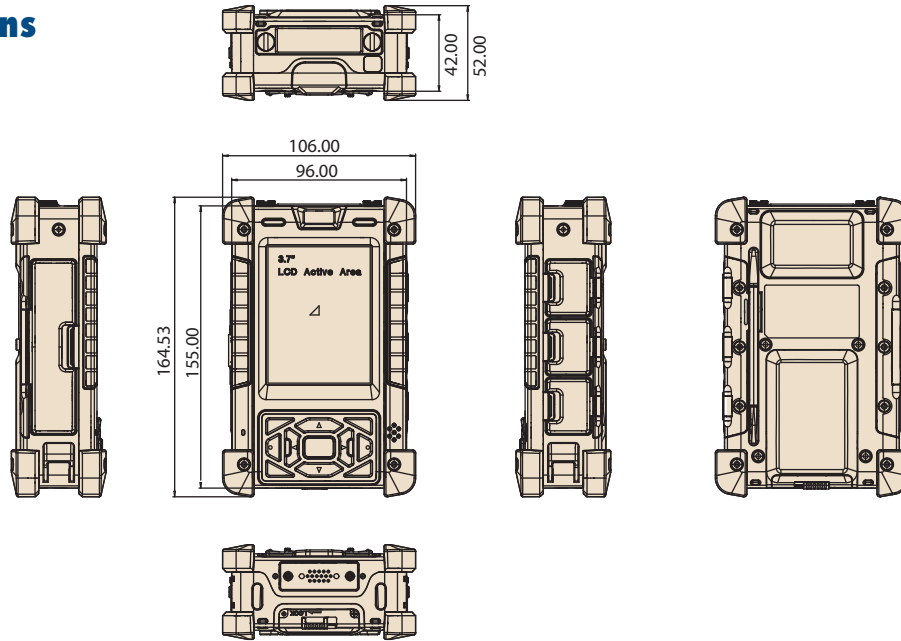

## I/O



- 1. Function buttons
- 2. Suspend button
- 3. Navigation keys
- 4. FN button
- 5. Enter keys
- 6. CF slot
- 7. Docking/cradle connector
- 8. Battery pack latch



- 9. RS 232
- 10. USB type A (USB 1.1 Host)
- 11. RS 232 (RS422/RS485)



- 12. RJ-45 Port & SW reset button
- 13. Handphone, microphone & micro SD slot
- 14. DC in & min USB type (USB 1.1 slave)

## Ordering Information

Part Number	Description
P37B-K2B7F5-5E00	PDA 3.7VGA 256SDRAM 1Gflash WLAN Bluetooth WIN-CE5.0
P37B-K2BAF5-5E00	PDA 3.7VGA 256SDRAM 1Gflash WLAN Bluetooth GPS WIN-CE5.0
P37B-K2BEF5-5E00	PDA 3.7VGA 256SDRAM 1Gflash WLAN Bluetooth GPS 3.5G WIN-CE5.0

## Accessories

Part Number	Description
P37B-91-P37BB-C01	Accessory P37B 4IN1 battery charger
P37B-91-P37BC-R02	Accessory P37B cradle
P37B-91-P37BM-C01	Accessory P37B converter box



[www.L-TronDirect.com](http://www.L-TronDirect.com)

800-830-9523

[info@L-Tron.com](mailto:info@L-Tron.com)

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

[www.L-Tron.com](http://www.L-Tron.com)

Get in touch with us  
on social media!

