

1000 Mbps, Compact, 3-port Media Converter

Giga-McBasic-II

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- Two 10/100/1000 Mbps copper ports
- One SFP port or fixed fiber port (available in SM or MM)
- Compact, rugged device with internal AC power supply
- Easy to install, unmanaged device
- Supports Link Fault Pass-Through
- Auto-negotiation, Auto-cross


The Giga-McBasic-II is a low-cost, compact, multi-port media converter that supports gigabit speed. Utilizing flexibility and compact size, interior private network applications can further benefit from the ever-expanding versatility of the McBasic product line.

Features two 10/100/1000Mbps copper UTP ports and one fiber port, which is available in an SFP form factor, as well as for fixed fiber in single mode, multi mode and single strand fiber. All models support gigabit speed. A compact stand-alone device with internal AC power supply, it is completely a PNP device; no management is available.

A troubleshooting feature, Link Fault Pass-Through (LFPT) allows network operators to determine a fault condition on the interfaces. LFPT can be enabled via a dip switch on the front of the unit.

MECHANICAL DIAGRAM

(dimensions in inches)

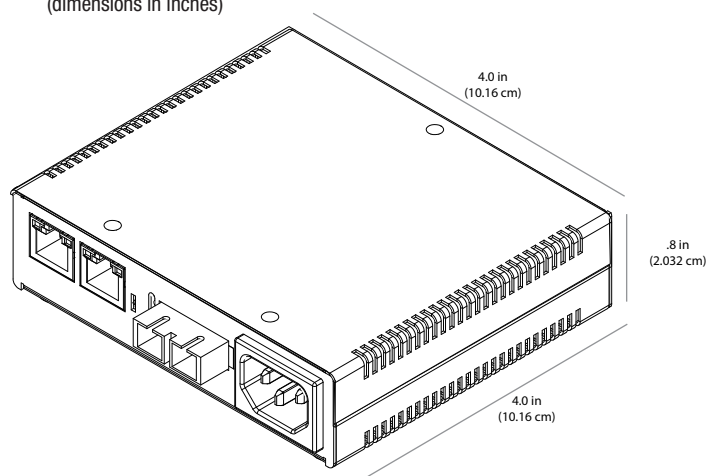

ORDERING INFORMATION

MODEL NUMBER	FIBER TYPE	FIBER PORTS	RANGE	ETHERNET PORT
Giga-McBasic-II				
856-30600	TX/SFP (requires one IE-SFP/1250 Module)	1	Variable (SFP)	(2) RJ-45
856-30601	TX/SX-MM850-SC	1	220/550 m	(2) RJ-45
856-30602	TX/LX-MM1300-SC	1	2 km	(2) RJ-45
856-30603	TX/LX-SM1310-SC	1	10 km	(2) RJ-45
856-30604	TX/LX-SM1310/PLUS-SC	1	40 km	(2) RJ-45
856-30605	TX/LX-SM1550/LONG-SC	1	80 km	(2) RJ-45
856-30606	TX/LX-SM1550/XLONG-SC	1	100 km	(2) RJ-45
Single-Strand Fiber				
856-30620	TX/SSLX-SM1310-SC (1310xmt/1550rcv)	1	15 km	(2) RJ-45
856-30621	TX/SSLX-SM1550-SC (1550xmt/1310rcv)	1	15 km	(2) RJ-45
856-30622	TX/SSBX-SM1310-SC (1310xmt/1490rcv)	1	10 km	(2) RJ-45
856-30623	TX/SSBX-SM1490-SC (1490xmt/1310rcv)	1	10 km	(2) RJ-45
856-30624	TX/SSFX-SM1310-SC (1310xmt/1550rcv)	1	40 km	(2) RJ-45
856-30625	TX/SSFX-SM1550-SC (1550xmt/1310rcv)	1	40 km	(2) RJ-45
856-30626	TX/SSFX-SM1310/PLUS-SC (1310xmt/1550rcv)	1	30 km	(2) RJ-45
856-30627	TX/SSFX-SM1550/PLUS-SC (1550xmt/1310rcv)	1	30 km	(2) RJ-45
856-30628	TX/SSBX-SM1310/PLUS-SC (1310xmt/1490rcv)	1	70 km	(2) RJ-45
856-30629	TX/SSBX-SM1490/PLUS-SC (1490xmt/1310rcv)	1	70 km	(2) RJ-45

SPECIFICATIONS

MECHANICAL

Connectors	RJ-45, SFP or fixed fiber
Dimensions	0.80H x 4.0W x 4.0D inches (2.032H x 10.16W x 10.16D cm)
Shipping Weight	0.7 lbs (0.3 kg)

POWER RATING

100-240V AC, 50-60 Hz, 7W maximum working power

ENVIRONMENTAL

Operating Temperature	+14° to +122°F (-10° to +50° C)
Storage Temperature	-31° to +167°F (-35° to +75° C)
Operating Humidity	5 to 95% (non-condensing)
Altitude	0 to 10,000 ft.

REGULATORY APPROVALS

FCC Class A
UL/cUL, CSA, CE

All product specifications are subject to change without notice.
Giga-McBasic-II_1615ds

ADVANTECH

B+B SMARTWORX

orders@advantech-bb.com
support@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445



www.L-TronDirect.com

800-830-9523

info@L-Tron.com

596 Fishers Station Dr | Victor, NY | 14564 | Suite 1 A

www.L-Tron.com

Get in touch with us
on social media!

