# FT6615 Fan-Free Terminal

- Intel Celeron® M 1.5GHz CPU w/1MB Cache
- Microsoft® Windows XP or WEPOS
- RAID SATA HDD
- CF Memory (option)
- Internal USB Battery (option)
- PCI Card Slot
- Resistive or Infrared touch interface
- Full Line of Complimentary Peripheral options
- Private label front bezel logo (option)



The FT Series is designed and built for the highest performance in harsh environments. This fan-free, rugged POS terminal features in Intel Celeron® M 1.5GHz processor with 1MB cache and a built in 2nd hard drive for RAID. It is ideally suited for retail, quick-service, full-service hospitality, grocery and specialized applications. A high-luminance TFT LCD comes standard with the FT Series, along with many optional accessories.

Optimized for true "Plug-n-Play" applications running Microsoft® Windows Embedded for Point-of-Service (WEPOS), the FT Series is what you'd expect from Posiflex - Leaders in POS Terminal Technology.

For more information call (888) 968.1668 today!







## FT Fan-Free Terminal Series

### Leaders in Terminal Technology


Specification         FT-6615 w/RAID           Processor         Celeron M 1.5ghz W/ 1MB Cache           VGA Memory         Share system memory up to 128MB           VGA Interface         D-SUB 15 pin           LCD Display         15" TFT LCD Panel, 1024x768 Resolution           DRAM Memory         2GB DDR2 SDRAM 533mhz, DIMM x2           Serial Port         4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved           Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 (1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603 </th <th></th> <th></th>			
VGA Memory         Share system memory up to 128MB           VGA Interface         D-SUB 15 pin           LCD Display         15" TFT LCD Panel, 1024x768 Resolution           DRAM Memory         2GB DDR2 SDRAM 533mhz, DIMM x2           Serial Port         4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved           Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 (1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Ves           Os support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           PD-7623<	Specification	FT-6615 w/RAID	
VGA Interface         D-SUB 15 pin           LCD Display         15" TFT LCD Panel, 1024x768 Resolution           DRAM Memory         2GB DDR2 SDRAM 533mhz, DIMM x2           Serial Port         4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved           Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 ( 1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200	Processor	Celeron M 1.5ghz W/ 1MB Cache	
LCD Display         15" TFT LCD Panel, 1024x768 Resolution           DRAM Memory         2GB DDR2 SDRAM 533mhz, DIMM x2           Serial Port         4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved           Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 ( 1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1 x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals         Yes           DP-308         LCD, 20x2 Pole Display           PD-7623         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor <t< td=""><td>VGA Memory</td><td>Share system memory up to 128MB</td></t<>	VGA Memory	Share system memory up to 128MB	
DRAM Memory         2GB DDR2 SDRAM 533mhz, DIMM x2           Serial Port         4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved           Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 (1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1 x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           Os support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM	VGA Interface	D-SUB 15 pin	
Serial Port         4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved           Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 ( 1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM         Through USB Port           RAID         Buil	LCD Display	15" TFT LCD Panel, 1024x768 Resolution	
Parallel Port         1           CF Card Slot         1           CR Port         1           Standard USB Port         4 ( 1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM         Through USB Port           RAID         Built in the HDD interface board           Wireless LAN         802.11 b/g with USB Interface </td <td>DRAM Memory</td> <td>2GB DDR2 SDRAM 533mhz, DIMM x2</td>	DRAM Memory	2GB DDR2 SDRAM 533mhz, DIMM x2	
CF Card Slot         1           Standard USB Port         4 (1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM         Through USB Port           RAID         Built in the HDD interface board           Wireless LAN         802.11 b/g with USB Interface	Serial Port	4 x DB9, 1 x RJ45, each with +5V power supply, +12V reserved	
CR Port         1           Standard USB Port         4 ( 1 in front, 3 in back)           PS/2 KP Port         1           PS/2 Mouse Port         1           Audio Port         Line-out/ MIC in/ W/ 2W spearker in base of unit           Ethernet Port         1x 10/100/1000 MB           UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM         Through USB Port           RAID         Built in the HDD interface board           Wireless LAN         802.11 b/g with USB Interface	Parallel Port	1	
Standard USB Port 4 (1 in front, 3 in back) PS/2 KP Port 1 PS/2 Mouse Port 1 Audio Port Line-out/ MIC in/ W/ 2W spearker in base of unit Ethernet Port 1x 10/100/1000 MB UPS Port 1 Touch Controller USB interface Touch Sensor 15" Resistive Extension Slot 1 (PCI) Storage Device 80GB SATA x2 Power Supply 12V DC power adapter, 80W Fan-Free System Yes OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals PD-2603 VFD, 20x2 Pole Display PD-308 LCD, 20x2 Pole Display PD-7623 LCD, 4x15 or 4x30 Pole Display FA-200 MSR + Optical Fingerprint sensor UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Interface Wireless LAN 802.11 b/g with USB Interface	CF Card Slot	1	
PS/2 KP Port 1 PS/2 Mouse Port 1 Audio Port Line-out/ MIC in/ W/ 2W spearker in base of unit Ethernet Port 1x 10/100/1000 MB UPS Port 1 Touch Controller USB interface Touch Sensor 15" Resistive Extension Slot 1 (PCI) Storage Device 80GB SATA x2 Power Supply 12V DC power adapter, 80W Fan-Free System Yes OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals PD-2603 VFD, 20x2 Pole Display PD-308 LCD, 20x2 Pole Display PD-7623 LCD, 4x15 or 4x30 Pole Display FA-200 MSR + Optical Fingerprint sensor UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	CR Port	1	
PS/2 Mouse Port 1 Audio Port Line-out/ MIC in/ W/ 2W spearker in base of unit Ethernet Port 1x 10/100/1000 MB  UPS Port 1 Touch Controller USB interface Touch Sensor 15" Resistive Extension Slot 1 (PCI) Storage Device 80GB SATA x2 Power Supply 12V DC power adapter, 80W Fan-Free System Yes OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals PD-2603 VFD, 20x2 Pole Display PD-308 LCD, 20x2 Pole Display PD-7623 LCD, 4x15 or 4x30 Pole Display FA-200 MSR + Optical Fingerprint sensor UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	Standard USB Port	4 ( 1 in front, 3 in back)	
Audio Port Line-out/ MIC in/ W/ 2W spearker in base of unit Ethernet Port 1x 10/100/1000 MB  UPS Port 1  Touch Controller USB interface  Touch Sensor 15" Resistive  Extension Slot 1 (PCI)  Storage Device 80GB SATA x2  Power Supply 12V DC power adapter, 80W  Fan-Free System Yes  OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	PS/2 KP Port	1	
Ethernet Port 1x 10/100/1000 MB  UPS Port 1  Touch Controller USB interface  Touch Sensor 15" Resistive  Extension Slot 1 (PCI)  Storage Device 80GB SATA x2  Power Supply 12V DC power adapter, 80W  Fan-Free System Yes  OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	PS/2 Mouse Port	1	
UPS Port         1           Touch Controller         USB interface           Touch Sensor         15" Resistive           Extension Slot         1 (PCI)           Storage Device         80GB SATA x2           Power Supply         12V DC power adapter, 80W           Fan-Free System         Yes           OS support         WEPOS, POSReady, Windows XP Pro           Optional Peripherals           PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM         Through USB Port           RAID         Built in the HDD interface board           Wireless LAN         802.11 b/g with USB Interface	Audio Port	Line-out/ MIC in/ W/ 2W spearker in base of unit	
Touch Controller  Touch Sensor  15" Resistive  Extension Slot  1 (PCI)  Storage Device  80GB SATA x2  Power Supply  12V DC power adapter, 80W  Fan-Free System  Ves  OS support  WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603  VFD, 20x2 Pole Display  PD-308  LCD, 20x2 Pole Display  PD-7623  LCD, 4x15 or 4x30 Pole Display  FA-200  MSR + Optical Fingerprint sensor  UPS Battery  2.3AH/12V Lead Acid Battery  CDROM  Through USB Port  RAID  Built in the HDD interface board  Wireless LAN  802.11 b/g with USB Interface	Ethernet Port	1x 10/100/1000 MB	
Touch Sensor 15" Resistive  Extension Slot 1 (PCI)  Storage Device 80GB SATA x2  Power Supply 12V DC power adapter, 80W  Fan-Free System Yes  OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	UPS Port	1	
Extension Slot 1 (PCI)  Storage Device 80GB SATA x2  Power Supply 12V DC power adapter, 80W  Fan-Free System Yes OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	Touch Controller	USB interface	
Storage Device 80GB SATA x2  Power Supply 12V DC power adapter, 80W  Fan-Free System Yes  OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	Touch Sensor	15" Resistive	
Power Supply 12V DC power adapter, 80W  Fan-Free System Yes  OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	Extension Slot	1 (PCI)	
Fan-Free System OS support WEPOS, POSReady, Windows XP Pro  Optional Peripherals  PD-2603 VFD, 20x2 Pole Display  PD-308 LCD, 20x2 Pole Display  PD-7623 LCD, 4x15 or 4x30 Pole Display  FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	Storage Device	80GB SATA x2	
OS support  Optional Peripherals  PD-2603  VFD, 20x2 Pole Display  PD-308  LCD, 20x2 Pole Display  PD-7623  LCD, 4x15 or 4x30 Pole Display  FA-200  MSR + Optical Fingerprint sensor  UPS Battery  2.3AH/12V Lead Acid Battery  CDROM  Through USB Port  RAID  Built in the HDD interface board  Wireless LAN  WePOS, POSReady, Windows XP Pro  WEPOS, POSReady, Windows XP Pro  Display  A Windows XP Pro  WEPOS, POSReady, Windows XP Pro  Wepos, PosReady, Windows XP Pro  Display  FD-308  LCD, 4x15 or 4x30 Pole Display  FA-200  MSR + Optical Fingerprint sensor  UPS Battery  2.3AH/12V Lead Acid Battery  CDROM  Through USB Port  RAID  Built in the HDD interface board	Power Supply	12V DC power adapter, 80W	
PD-2603 VFD, 20x2 Pole Display PD-308 LCD, 20x2 Pole Display PD-7623 LCD, 4x15 or 4x30 Pole Display FA-200 MSR + Optical Fingerprint sensor UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	Fan-Free System	Yes	
PD-2603         VFD, 20x2 Pole Display           PD-308         LCD, 20x2 Pole Display           PD-7623         LCD, 4x15 or 4x30 Pole Display           FA-200         MSR + Optical Fingerprint sensor           UPS Battery         2.3AH/12V Lead Acid Battery           CDROM         Through USB Port           RAID         Built in the HDD interface board           Wireless LAN         802.11 b/g with USB Interface	OS support	WEPOS, POSReady, Windows XP Pro	
PD-308 LCD, 20x2 Pole Display PD-7623 LCD, 4x15 or 4x30 Pole Display FA-200 MSR + Optical Fingerprint sensor UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	Optional Peripherals		
PD-7623 LCD, 4x15 or 4x30 Pole Display FA-200 MSR + Optical Fingerprint sensor UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	PD-2603	VFD, 20x2 Pole Display	
FA-200 MSR + Optical Fingerprint sensor  UPS Battery 2.3AH/12V Lead Acid Battery  CDROM Through USB Port  RAID Built in the HDD interface board  Wireless LAN 802.11 b/g with USB Interface	PD-308	LCD, 20x2 Pole Display	
UPS Battery 2.3AH/12V Lead Acid Battery CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	PD-7623	LCD, 4x15 or 4x30 Pole Display	
CDROM Through USB Port RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	FA-200	MSR + Optical Fingerprint sensor	
RAID Built in the HDD interface board Wireless LAN 802.11 b/g with USB Interface	UPS Battery	2.3AH/12V Lead Acid Battery	
Wireless LAN 802.11 b/g with USB Interface	CDROM	Through USB Port	
<u> </u>	RAID	Built in the HDD interface board	
CF Card Slot Type II, for memory card only	Wireless LAN	802.11 b/g with USB Interface	
	CF Card Slot	Type II, for memory card only	



### ALL FT FAN-FREE TERMINAL MODELS CAN BUNDLE WITH:

- FA200 Series MSR with/without DigitalPersona U.are.U Finger Print Sensor
- · CR6000 Series Cash Drawer
- PP7000 Series Aura Thermal Receipt Printer
- PD308U / PD2603U-B Series Pole Display
- LM6601 2nd LCD Display
- FB200 Printer Bracket

Optional Pole display	MSR w/ DigitalPersona Fingerpirnt Biometrics

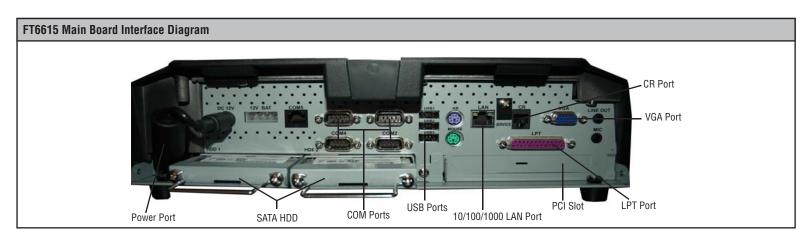

#### **About Posiflex**

Established in 1984, Posiflex is recognized as a leading provider of innovative Point-of-Service (POS) hardware and platform technology used in diverse markets. Posiflex partners with applications software developers to provide reliable POS terminal systems to the hospitality, healthcare, medical, retial and specialized markets. The Company's products are sold through industry specialists, value-added resellers and distributors. All products are designed and manufactured in Taipei, Taiwan in two ISO 9001/9002/14001 certified laboratories and factories. Posiflex USA is located just north of the Silicon Valley, in Hayward, California. For additional information on Posiflex and the diverse product line, visit www.posiflexusa.com or call 888.968.1668.



30689 Huntwood Avenue, Hayward, CA 94544 Toll-free: 888.968.1668 Phone: 510.429.7097 Fax: 510.475.0982

e-mail: sales@posiflexusa.com www.posiflexusa.com



www.L-TronDirect.com 800-830-9523 info@L-Tron.com

